


INSULATING MATERIALS

Thermal Management

Electrical Engineering

Medical

Mobility

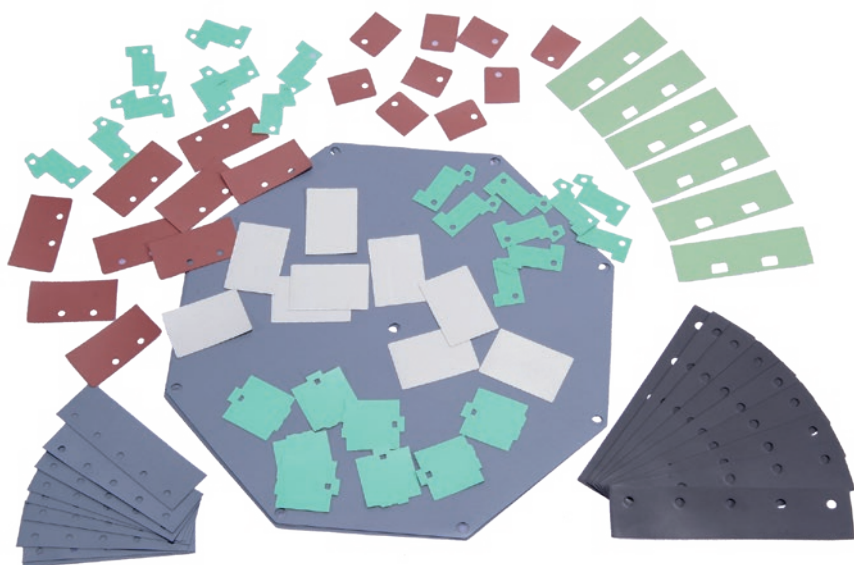

www.detakta.de

Specialized in:

Thermal conductive foils

silicone based with glass fabric, gel-like, adherent or self-adhesive

Insulating tubes

PVC, Silicone, PTFE, Polyimide

Glassfibre sleeveings

coated with: Acrylic, Polyurethane, Silicone as well as saturated or only heat treated

Heat shrink tubes

Hard-PVC, Polyolefine, PET, PVDF, PTFE, FKM, Silicone

Cable, Wire, Litzwires

Polyimide, PTFE, FEP, Ceramic resp. Silicone insulated

Insulation materials

(flexible & rigid)

PET, Polyimide, Silicone, PTFE, HGW, Calcium silicate, Glass bounded mica

Plastic mounting parts

FASTPOINT Cable fasteners, Cable ties, PCB spacers, Rivets, Screws, Hole plugs, Bumpers and Caps

Production auxiliary

TECHSPRAY Aerosols, Solder masks, Wipes and Silicone glue



Electro magnetic shielding

Foils, Sheets, Customized parts

also approved




and/or

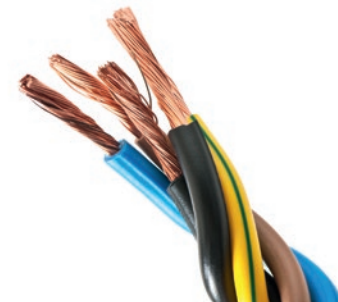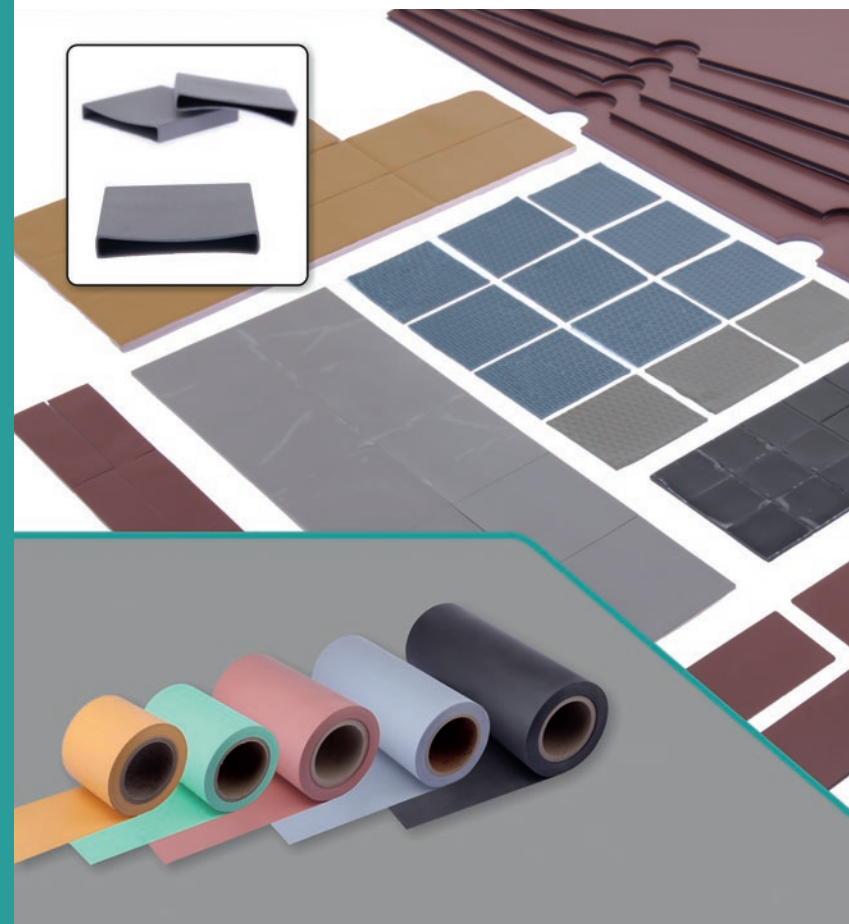

Focused on:

Customer specific advice based on our more than 70 years of experience in the sale of technically high quality and innovative electrical insulation materials for a wide range of applications.

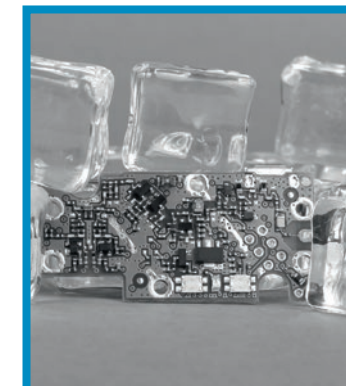

Thermal Management

Thermal Interface Material (TIM)

Series:

SB-HIS: 1,0 to 5,0 W/mK
Thickness: 0,15 – 0,8 mm

Silicone-Softpads

Series:

SBC: 1,0 to 7,0 W/mK
Thickness: 0,5 – 5,0 mm

Silicone-Pads, reinforced


Series:

SB-V0: 0,9 to 7,0 W/mK
Thickness: 0,5 – 5,0 mm

Thermaphase

Polyimide foil with a Phase Change Coating

Electrical and thermal conductive foil based on Aluminium (8843SW) resp. Graphite (SB-GR)

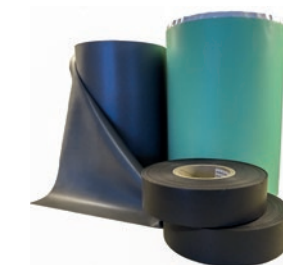

Customized parts

- water jet cut
- plottet
- punched



Electrical engineering

Insulating tubing from:

PVC up to +90 resp. +105°C
Silicone up to +200°C
PTFE up to +260°C

Glassfibre sleeving coated with:


Polyurethane resp. Acrylic up to +155°C
Silicone up to +235/+250°C a.o. expandable ratio 1:2

Silicone varnish, saturated up to +300°C

Glassfibre sleeving, heat-treated up to +550°C

Heat shrink tube from:

Polyolefine up to +125/135°C a.o. with adhesive, PVDF (Kynar®) up to +190°C
Elastomer up to +200°C
PTFE up to +260°C

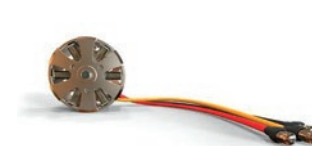

Customized parts

- cut to length
- printed
- private label



Medical

Silicone-tubing peroxide or platinum catalyzed acc. BfR XR Silicone, FDA §177.2600, USP Class VI, Id. ≥0,2 mm, wall. ≥0,1 mm, up to +200°C

PTFE-tubing

acc. FDA §177.2600, USP Cl. VI resp. ISO 10993 Id. ≥0,2 mm resp. AWG 30 up to +260°C



Polyimide tubing

(biokompatibel) Id. ≥0,08 mm, Wall. ≥0,013 mm, up to +240°C

Polyester heat shrink tubing

acc. USP Cl. VI, ISO 10993, Id. ≥0,15 mm, Wall. ≥0,006 mm, up to +135°C


Medic-R Polyolefine heat shrink tubing based on ISO 10993, USP, FDA raw material



Mobility

Protective sleeveings from: Polyester Monofilament, expandable ratio 1:2, acc. EN 45545-2 2013 up to +150°C

Self-Close Polyester sleeving acc. ISO 6722, up to +150°C

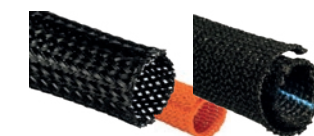

Fabric shrink tubing from Polyester/Polyolefine, ratio 2:1, highly abrasion resistant, up to +125°C



Our products are RoHS & REACH compliant

Motivated to convince you!

We would be pleased if you contact us.
Our team will be happy to serve you.



Competence

Our individual advice is based on knowledge gained over more than 70 years of experience with the possible applications of our products

Product portfolio

The product range, which has grown over the years, has been continuously adapted to market requirements and is intended to offer you the possibility of obtaining your requirements for insulation and production aids from a single source.

Warehousing

Our extensive inventory management allows for a variety of deliveries within 24 hrs.

Service

We see our task especially in the solution of your specific application problems. This is also implemented through our numerous contacts to domestic and foreign companies with their variety of special products for the electrical industry.

For over 70 years

Detakta Hans-Herbert von Saenger,
Isolier- und Messtechnik GmbH & Co. KG
Hans-Böckler-Ring 19, 22851 Norderstedt
Tel: +49 40 529547 0 | Fax: +49 40 529547 11
eMail: info@detakta.de | www.detakta.de